

Contractor Gauge



Application Fields: HVAC • Plumbing • Inspection & Validation • Pneumatic Application


Description

Our contractor gauge is a versatile and cost-effective solution for many application fields. The rugged stainless-steel case allows them to function in corrosive environments. The faceplates are easily customizable, making them a favorite mainstay for many customers.

Specifications

- 4.5" Dial Diameter
- Standard Stainless-Steel Case
- Standard Polycarbonate Lens
- Socket & Bourden Tube Material: Standard Brass* or Lead-Free Brass
- Pressure Range: 0 up to 4000 psi or Vacuum/Compound 30"Hg up to 150 psi. Can do dual or triple scale with Bar, kPa, feet H₂O, and others
- Standard Bottom/Low 1/4" NPT without a restrictor
- Customizable Face and Needle
 - Standard Black for Single Scale
 - Black/Blue for Dual Scale on White Dial
 - Other colors available for both markings and dial
 - Black, White or Red Needle; ask for other colors
 - Customize with your logo or colored bands

Technical Drawings

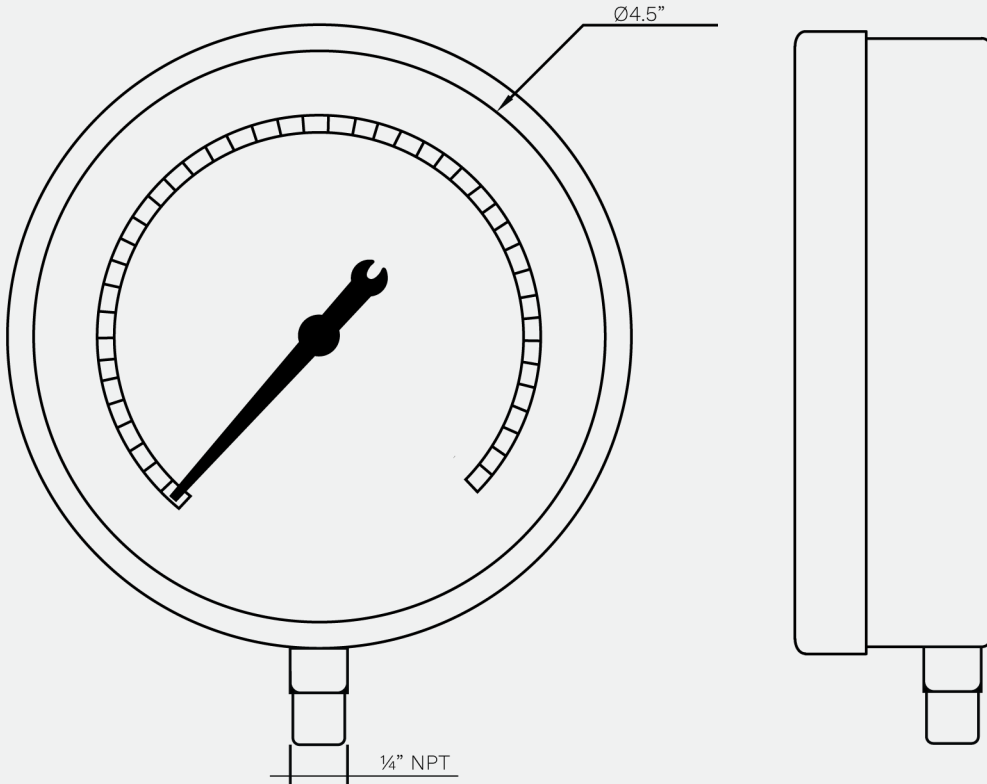

Available Pressure Ranges*

Pressure Range Vacuum/ Compound in Hg <i>Also available in cmHG</i>	Pressure Ranges in PSI*	
	30" Hg - 0 psi	0 - 15 psi
30" Hg - 15 psi	0 - 30 psi	0 - 600 psi
30" Hg - 30 psi	0 - 60 psi	0 - 1000 psi
30" Hg - 60 psi	0 - 100 psi	0 - 1500 psi
30" Hg - 150 psi	0 - 160 psi	0 - 2000 psi
	0 - 200 psi	0 - 3000 psi
	0 - 300 psi	0 - 4000 psi

*Also available in Bar, kPa, feet H₂O

*Contact for greater ranges than shown