Remote Tridicator

Application Fields: Boilers • Hot Water Heaters

Specifications

- 2” Dial Diameter
- Standard Black ABS Plastic Case and Poly carbonate lens
  - Contact for other materials
- Customized Mounting available to fit your Display Panel/Unit
- Standard Brass* or Lead-Free Brass Wetted Parts
- Variety of Capillary Protection Options for both Temperature and Pressure Lines:
  - PVC Coated
  - Copper Braid
  - Sheath
- Multitude of Options for Installing the Sensor Bulbs:
  - Union Connection
  - Socket/Thermowell
  - Attached Threads
  - Custom
- Industry Standard Temperature Range 70-320°F/C
  - Customizable
- Painted Plastic or Aluminum Dial Face with customizable Options:
  - White, Black, Red and/or Blue Markings
  - Black or White Background
  - Black, White, and/or Red Pointers
  - Logo

Description

A specialized variation of the standard tridicator, remote tridicators allow flexibility in mounting the dial away from the measuring point, making them perfect for centralized display panels or unit restrictions. Since they are unique to each application, simply give us your design, and we can make it happen!

Technical Drawings

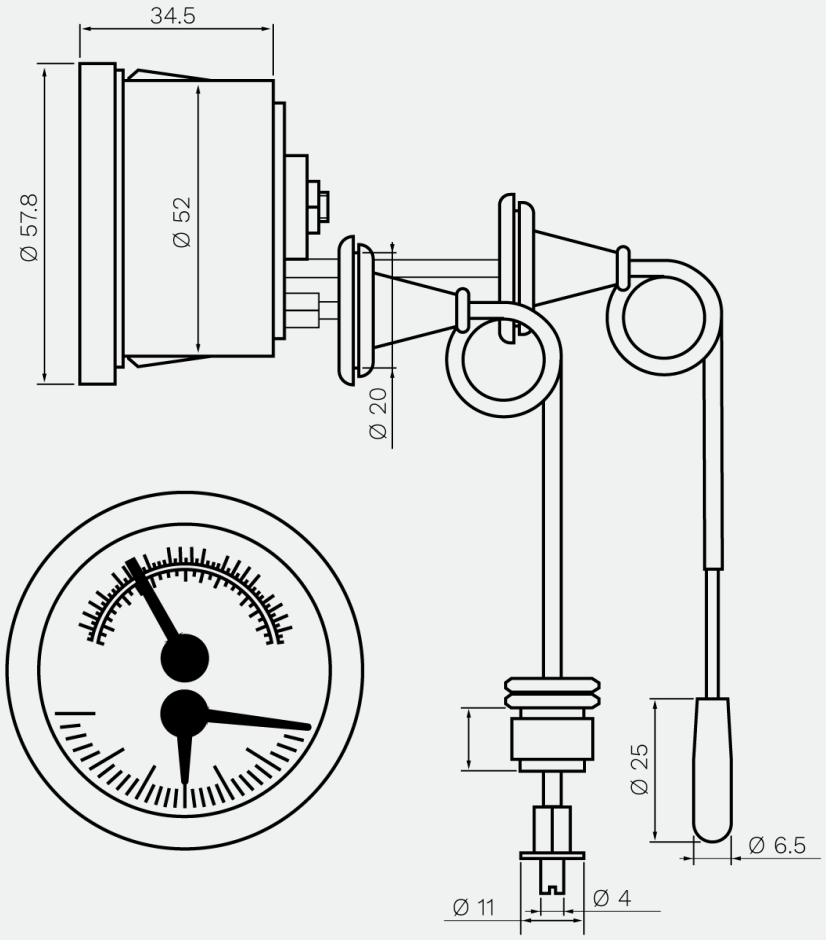

Available Pressure Ranges*

Pressure Ranges in PSI*	
0 - 50 psi	0 - 160 psi
0 - 60 psi	0 - 200 psi
0 - 75 psi	0 - 225 psi
0 - 90 psi	0 - 250 psi
0 - 100 psi	0 - 300 psi

*Also available in Bar, kPa, feet H_2O
*Contact for greater ranges than shown