2.5" Steam Gauge

Our steam gauges are specifically designed to withstand the rigors of boiler applications. Made with a double internal siphon and pure brass parts, this 2.5" gauge is a dependable, corrosion-resistant solution for tough applications.

Sample Product Photo

- Double Internal Siphon
- Custom Logo & Color Band on Dial
- Single, Dual, or Triple Scale Customizable
- Dial Face, Markings, & Needle Customizable
- Application Fields include Boiler and Industrial & Residential

Specifications	
Dimensions	2.5” Dial Diameter
Case	Black Painted Steel Case (Standard)
Lens	**Polycarbonate** or **Glass**
Markings & Dial	**Black** Markings on White Dial (Single Scale) or **Black** and **Blue** Markings on White Dial (Dual & Triple Scale)
Pressure Range	See next page table. **0 psi up to 4000 psi** or, Vacuum/Compound **30" Hg up to 150 psi**
Unit Scale (Dual & Triple)	**Bar, kPa, ft. H20, and others**
Socket & Bourdon Tube	**Brass^** (Standard) or **Lead-Free Brass**

^Pressure gauges with Brass Components will have a Proposition 65 Warning Label for lead content.

Needle Options
Red
Black (Standard)
White

Connection Options
Center Back
Bottom Low

Thread Options
1/8" NPT with Restrictor
1/4" NPT with Restrictor
1/2" NPT with Restrictor

Mounting Options
Front Flange
Rear Flange
U Clamp

2.5" Steam Gauge

Available Pressure Ranges*†

Vacuum/Compound Ranges in HG‡	Pressure Ranges in PSI	
30"Hg - 0 psi	0 to 15 psi	0 to 400 psi
30"Hg - 15 psi	0 to 30 psi	0 to 600 psi
30"Hg - 30 psi	0 to 60 psi	0 to 1000 psi
30"Hg - 60 psi	0 to 100 psi	0 to 1500 psi
30"Hg - 150 psi	0 to 160 psi	0 to 2000 psi
	0 to 200 psi	0 to 3000 psi
‡Also available in cmHG	0 to 300 psi	0 to 4000 psi

*Contact for greater ranges than shown.
†Dual/Triple scale also available in Bar, kPa, ft. H20, etc.

Sample Technical Drawings

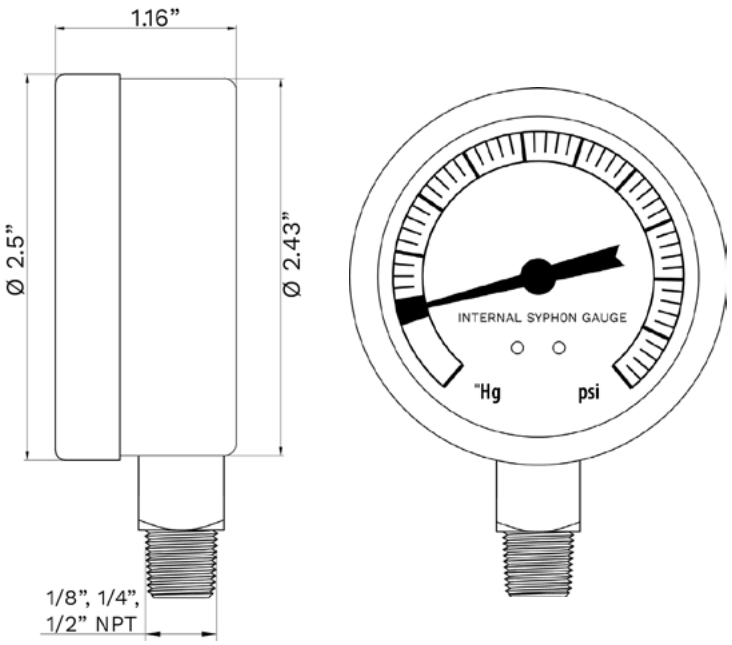

Bottom Low