2" Remote Tridicator

Our remote tridicators allow flexibility in mounting the dial away from the measuring point, making them perfect for centralized display panels or unit restrictions. Since they are unique to each application, simply give us your design, and we can make it happen!

Sample Product Photo

- Custom Logo
- Dual or Triple Scale Customizable
- Dial Face, Markings, & Needle Customizable
- Multiple Sensor Bulb Installation Options
- Variety of Capillary Protection Options for Both Temperature and Pressure Lines: PVC Coated, Copper Braid, Sheath
- Application Fields include Boilers and Hot Water Heaters

Specifications	
Dimensions	2” Dial Diameter
Case*	ABS Plastic Case in Black (Standard)
Lens*	Polycarbonate (Standard)
Markings & Dial*	Multiple Marking Options on **Painted Plastic** or **Aluminum Dial Face**
Measuring Range*	70°F up to 320°F (21°C to 160°C)
Pressure Range	See next page table. **0 psi up to 300 psi**
Unit Scale (Dual & Triple)	**Bar, kPa, ft. H20, and others**
Mounting & Connection	Customized to Fit your Display Panel/Unit
Wetted Parts & Stem Material	**Brass^** (Standard) or **Lead-Free Brass**

*Contact for Custom Needs.

^Tridicators with standard Brass sockets will have a Proposition 65 Warning Label for lead content.

Dial Face Options
Black Background
White Background

Needle Options
Red
Black
White

Markings Options
White
Black
Red
Blue

Bulb Installation Opt.s
Union Connection
Socket/Thermowell
Attached Threads
Custom

2" Remote Tridicator

Available Pressure Ranges*†

Pressure Ranges in PSI	
0 to 50 psi	0 to 160 psi
0 to 60 psi	0 to 200 psi
0 to 75 psi	0 to 225 psi
0 to 90 psi	0 to 250 psi
0 to 100 psi	0 to 300 psi

*Contact for greater ranges than shown.
†Dual/Triple scale also available in Bar, kPa, ft. H20, etc.
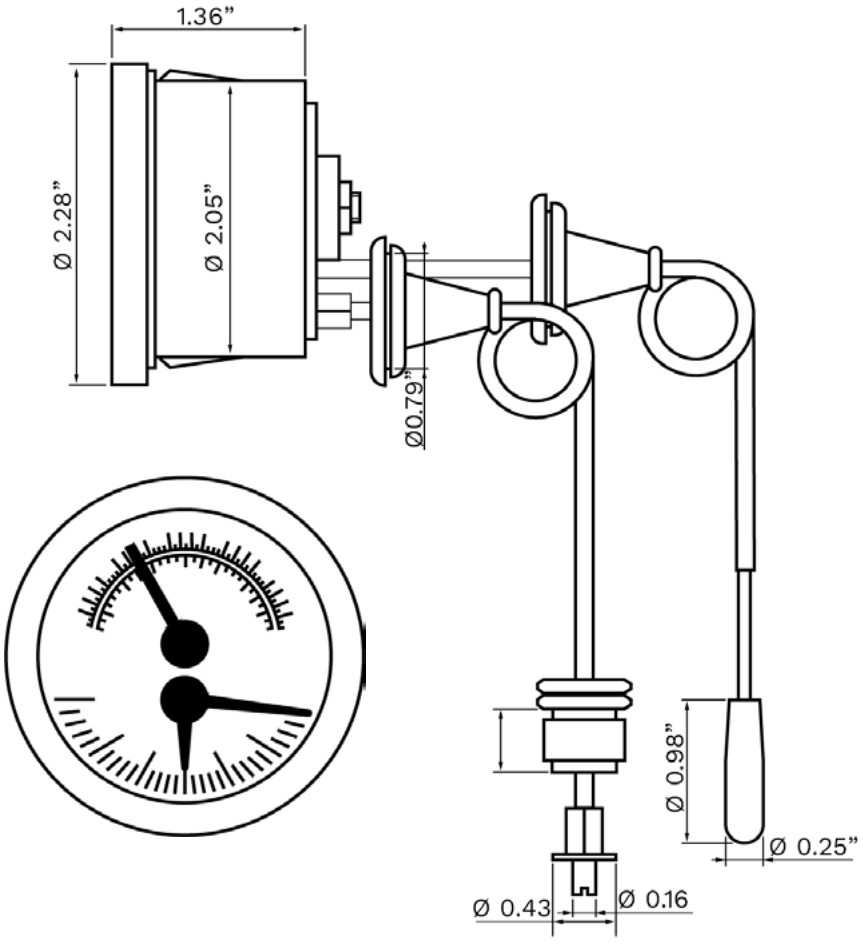
Sample Technical Drawings